

bluecube produces a range of media solutions that are designed to meet the following venue requirements -


- Permanent media areas installed with fixed desks that accommodate a set number of seat positions.
- Temporary media areas installed with a set number seats which can be quickly and easily 'changed out' to accommodate desks.
- Flexible media areas- installed with a set number of seats and writing tablet arms which can be used as either general admission seating or as media positions.


- Min row depth (RD) requirement 1200mm
- Min average seat spacing (SC) 650mm


### features

- 460mm desk top depth (DD)
- Continuous row installation (without intermittent egress steps)
- Optional modesty panel
- Automatic seat return

## **Permanent Desk – Low Density**

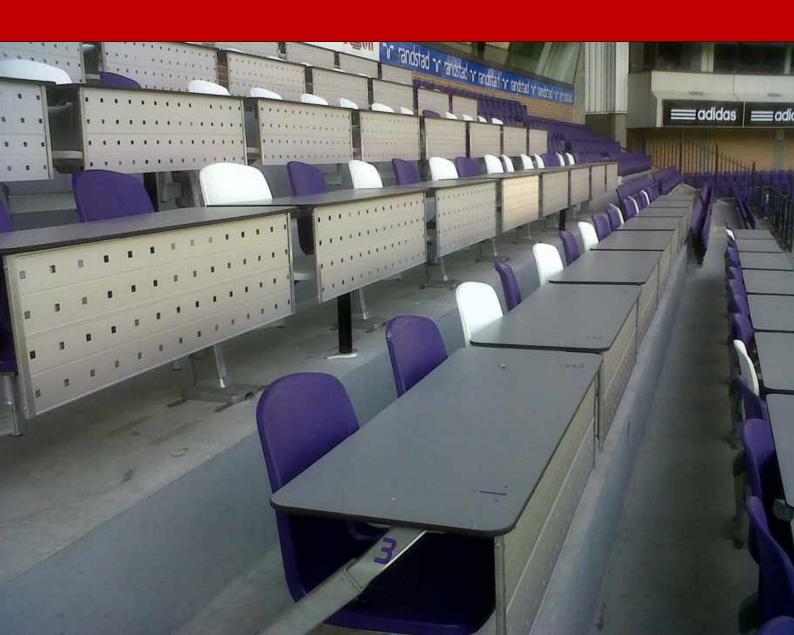

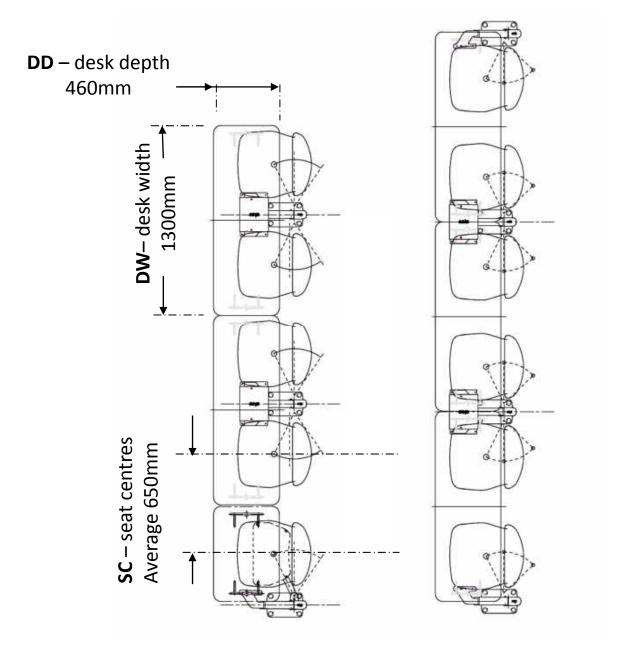

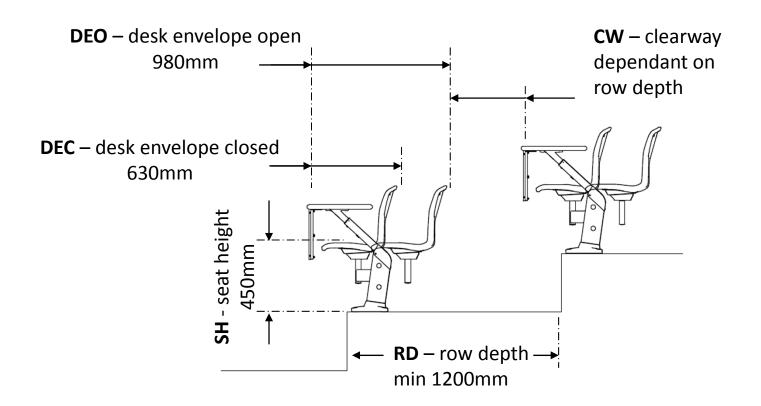



- Min row depth (RD) requirement 800mm
- Min seat spacing (SC) 550mm

#### **Features**

- 350mm desk top depth (DD)
- Requires egress steps (every 2 seat places)
- Optional modesty panel

## Permanent Desk - Mid Density

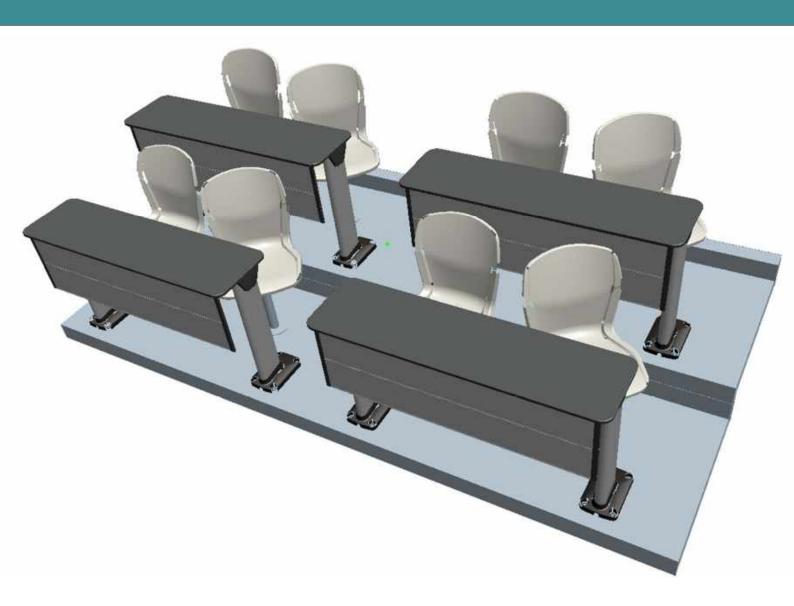

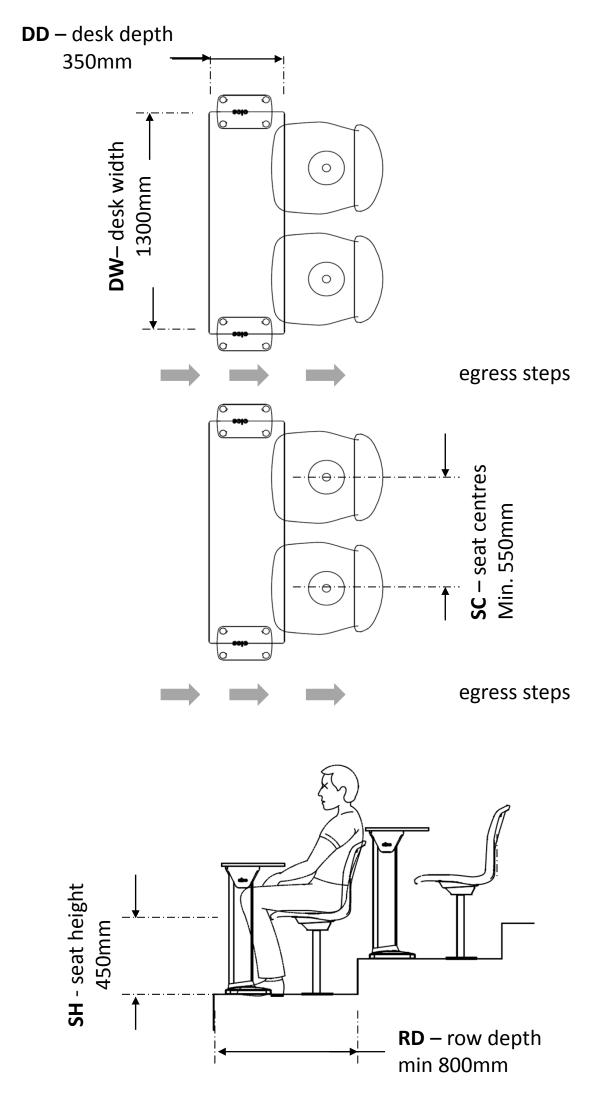


- Min row depth requirement (RD) 1200mm
- Min seat spacing (SC) 550mm


#### **Features**

- 350mm desk top depth (DD)
- Continuous row installation (without intermittent egress steps)
- Optional modesty panel

# Permanent Desk – High Density



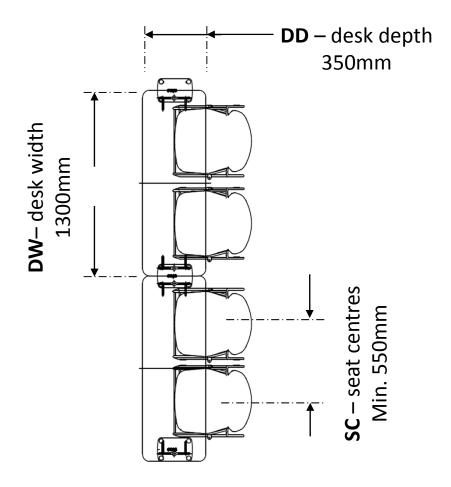

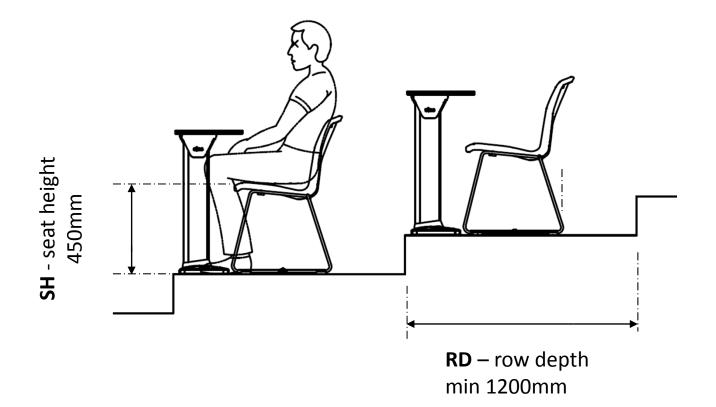

- Min row depth requirement (RD) 750mm
- Min seat spacing (SC) 500mm

#### **Features**

- Choice of self tipping seat model
- Requires egress steps (every 2 seat places)
- Easy conversion to GA seating

## **Temporary Desk**

Typical layout shown in media mode








Light weight (25Kg) aluminium storage stillages are available for storage of the desk and seat units when they are removed from the layout.

## Typical layout shown in seating mode





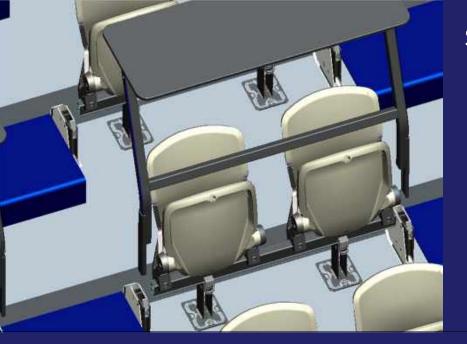

**fast** – **latch** mechanisms make changing over from a media to an all seated set up quick and easy – the area is arranged 2 & 1 seat modules.


Changeover sequence from media to full seated general admission & vice versa.

Step 1 - Remove desks from the **fast – latch** system.

Step 2 - Plug in the single seat modules into the **fast** – **latch** system to infill the intermittent egress steps.

Step 2



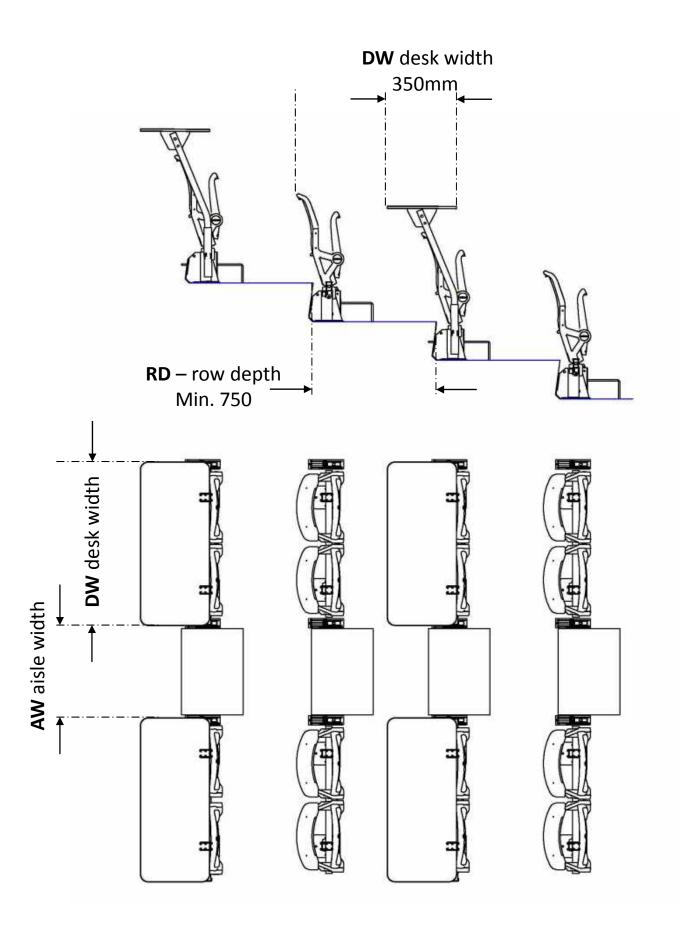


- Min row depth requirement 800mm
- Min average seat spacing 550mm

#### **Features**

- Continuous row installation ( without intermediate egress steps)
- Seats can be used as GA seats without re-configuration

## Flexible media areas



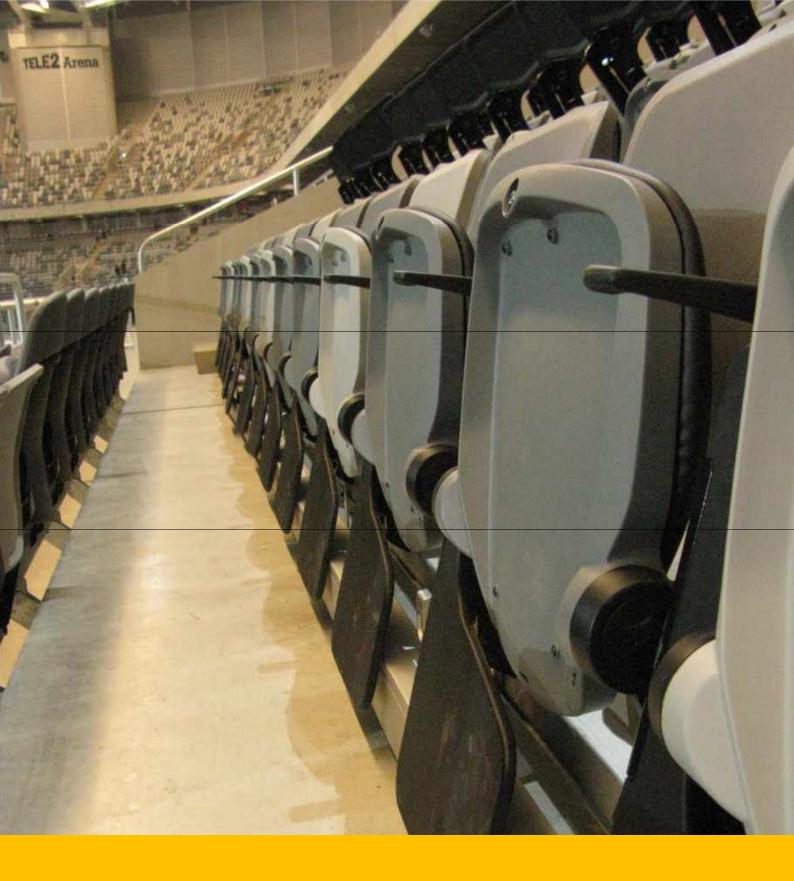

If the requirement is more flexibility than a permanent desk **scribe** folding tablet arms allow the media area to be sold as general admission then the tablet is in 'stowed' position – refer to the **scribe** product sheet for full detail.

Power and data can be provided at each position by the addition of an electrical conduit running the entire length of the row.

